



# ISR6 Sensor

## Intrinsically Safe

### Acoustic Emission Sensor


#### Description and Features

The ISR6 sensor was designed specially to meet Intrinsic Safety (IS) and IP65 environmental requirements. Certified as Intrinsically Safe (IS) for use with our 1276-2 IS preamplifier and 1276-1 and 1278 IS ASL-C subsystem, this sensor has a thicker ceramic wear-plate and an epoxy coating completely covering the sensor and cable exit. An IS voltage protection circuit is built into the sensor.

It has an integrated one-meter long differential cable with extruded TPE jacket and a pigtail for connecting into a 1276 or 1278 IS Preamplifier or Subsystem. The sensor has similar frequency response as the R6 sensor. Its maximum operating temperature is 125°C.

#### Applications

This sensor is ideal for use on metal and FRP structures such as pipelines or storage tanks in petroleum, refineries, chemical plants, and offshore platforms, due to its high sensitivity and low resonance frequency properties.

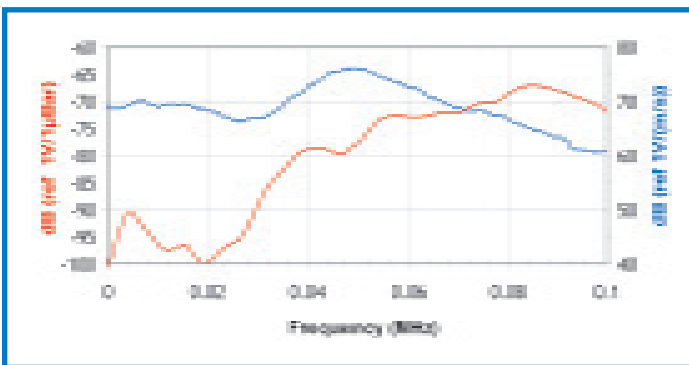

Frequency response of the ISR6. Calibration based on ASTM E1106; Calibration based on ASTM E976.

#### Operating Specifications

##### Dynamic

Peak Sensitivity, Ref V/(m/s) .....	76 dB
Peak Sensitivity, Ref V/μbar .....	-63 dB
Operating Frequency Range .....	35 - 80 kHz
Resonant Frequency, Ref V/(m/s).....	50 kHz
Resonant Frequency, Ref V/μbar .....	850 kHz
Directionality.....	+/-1.5 dB

##### Environmental

Temperature Range .....	-45 to 125°C
Shock Limit .....	1,000 g
Completely shielded crystal for maximum RFI/EMI immunity	

##### Physical

Dimensions.....	0.89" diameter x 0.755" h
	(22.6 x 19.2 mm)
Weight.....	33 grams with 1 meter cable
Case Material.....	Stainless Steel/Epoxy
Face Material.....	Ceramic
Connector.....	Pigtail
Connector Locations .....	Side
Seal .....	Epoxy
Sensor to Preamp Cable (1 meter) .....	Integral

#### Ordering Information and Accessories

ISR6 .....	ISR6
Preamplifier.....	1276-2
ASL-4-20 ma Subsystem .....	1276-1
Preamp to System Cable .....	1276C
IS Zener Barrier .....	1276B
Other IS Sensors are available with various resonant frequencies.	

##### Sensors include

NIST Calibration Certificate & Warranty



Products & Systems  
Division

195 Clarksville Road, Princeton Junction, NJ 08550

Phone: 609-716-4000 • Fax: 609-716-0706 •

Email: sales.systems@mistrasgroup.com • www.mistrasgroup.com

